FEASIBILITY REPORT

Sample: Waller garden apartments

Option A · for Finishes Solutions (sample) · inputs 332a5c7a · Generated October 24, 2026

Finishes SOLUTIONS LLC.

Scope. Feasibility / schematic level only. The plan set is a schematic-design set for planning and pricing conversations. It is not a permit set and not construction documents, and it has not been prepared, sealed or reviewed by a licensed architect or engineer. Parcel lines come from appraisal-district or provider data, not a boundary survey. Costs are parametric estimates from a single-project workbook and house rates, not contractor bids. Market rents, cap rates and financing terms are assumptions, not appraisals. Use the outputs to decide whether to pursue a site, not to build from.

$79.23M TOTAL DEVELOPMENT COST	**$3.85M** STABILIZED NOI	**4.86%** YIELD ON COST	**3.51%** LEVERED IRR
389 units 425,611 GROSS SF	**$2.64M** LAND	**$10.60M** LEVERED PROFIT	**−$11.26M** LEVERED NPV AT 10%

Summary

Sample: Waller garden apartments: 15.97 acres laid out as Option A — 389 units, 425,611 gross sf, 657 parking spaces. Total development cost $79,227,648 ($203,670 a unit), of which land $2,639,000, construction contract $58,846,996, soft costs $7,576,403 and financing $8,029,298. Stabilized NOI $3,853,211 is a 4.86% yield on cost against a 5.5% market cap rate; levered IRR 3.51%, unlevered 5.33%, equity multiple 1.28×, over 9.4 years.

What matters most: thin development spread; levered irr below a typical 12–15% development hurdle; returns turn negative on a common miss.

Site and layout

Site area	15.97 acres · 695,836 sf
Buildable envelope	660,498 sf at a 10 ft setback (95% of the site)
Program	multifamily · 389 units
Building area	425,611 gross sf · footprint 145,470 sf
Coverage / FAR	20.9% / 0.61
Parking	657 spaces of 623 required
Detention	8.79 ac-ft (rule of thumb)

UNIT	SIZE (SF)	UNITS
Studio	550	39
1 BR	760	175
2 BR	1,100	136
3 BR	1,350	39



Option A: concept layout from the platform's layout engine, not a survey or an engineered plan.

Plan set (schematic)

35 sheets on the Finishes Solutions title block, not issued yet (made from the project's Plans tab). Building types the set cannot design yet (no floor-plan sheets): Multifamily. Schematic design only: not for permit or construction.

SHEET	TITLE
G-001	Cover sheet — Sheet index · Project data · Notes
G-002	General notes — Codes · Symbols · Abbreviations
G-003	Code analysis — Occupancy · Construction · Occupant load · Egress
C-001	Existing conditions — Boundary · Easements · Flood zone
C-101	Overall site plan — Land use · Circulation · Program · Parking
C-102	Dimension & paving plan — Setbacks · Drives · Parking · Fire lanes
C-201	Grading & drainage plan — Schematic grading · Storm sewer · Inlets
C-202	Detention summary — Storage required and provided
C-301	Utility plan — Water · Sanitary sewer · Storm · Services
C-401	Erosion & sediment control plan — SWPPP layout
C-501	Civil details — Paving · Curb · Ramp · Enclosure · Erosion control
L-101	Landscape plan — Trees · Shrubs · Sod · Plant schedule
L-501	Landscape details — Planting details
A-101	Floor & roof plans — Type G — Type G — Amenity / commons (60' × 90', 1 story)
A-201	Exterior elevations — Type G — Type G — Amenity / commons (60' × 90', 1 story)
A-301	Building sections — Type G — Type G — Amenity / commons (60' × 90', 1 story)
A-501	Wall sections & typical details — By construction type
A-601	Door, window & finish schedules — Type G — Type G — Amenity / commons (60' × 90', 1 story)
S-001	Structural general notes — Design criteria
S-101	Foundation plan — Type G — Type G — Amenity / commons (60' × 90', 1 story)
S-201	Framing plans — Type G — Type G — Amenity / commons (60' × 90', 1 story)
S-501	Structural details — Typical details
M-001	Mechanical notes & schedules — Legend · Equipment
M-101	HVAC plans — Type G — Type G — Amenity / commons (60' × 90', 1 story)
P-001	Plumbing notes & schedules — Legend · Fixtures
P-101	Plumbing plans — Type G — Type G — Amenity / commons (60' × 90', 1 story)
P-601	Plumbing riser diagrams — Water · Waste and vent
E-001	Electrical notes & schedules — Legend · Panels · Loads
E-101	Site lighting plan — Poles · Wall packs
E-201	Power & lighting plans — Type G — Type G — Amenity / commons (60' × 90', 1 story)
E-601	Electrical one-line diagram — Service · Panels
FP-101	Fire access & hydrant plan — Fire lanes · Hydrants · Hose reach

SHEET	TITLE
FP-201	Fire sprinkler plan — Type G — Type G — Amenity / commons (60' × 90', 1 story)
FA-201	Fire alarm plan — Type G — Type G — Amenity / commons (60' × 90', 1 story)
LS-101	Life safety plan — Type G — Type G — Amenity / commons (60' × 90', 1 story)

Budget

Priced from the layout's quantities: the Finishes Solutions budget workbook's CSI lines for apartment and townhome buildings, the platform's parametric rates for other uses and for site work, escalated × 1.0680 (library) / × 1.0636 (parametric) and at a location factor of 1.00. Rolled up the budgeting suite's way: contract = hard + GC fee + contingency; the developer fee is 3% of the total it is part of.

	AMOUNT	A UNIT	A GROSS SF	SHARE
Land and closing	$2,639,000	$6,784	$6.20	3.3%
Building	$45,022,159	$115,738	$105.78	56.8%
GC fee (library lines)	$5,402,659	$13,889	$12.69	6.8%
Site work	$5,877,210	$15,109	$13.81	7.4%
Hard-cost contingency	$2,544,968	$6,542	$5.98	3.2%
Construction contract	$58,846,996	$151,278	$138.26	74.3%
Soft costs	$7,576,403	$19,477	$17.80	9.6%
Developer fee	$2,135,950	$5,491	$5.02	2.7%
Project cost before financing	$71,198,349	$183,029	$167.29	89.9%
Construction interest	$7,602,108	$19,543	$17.86	9.6%
Loan fees	$427,190	$1,098	$1.00	0.5%
Total development cost	$79,227,648	$203,670	$186.15	100.0%

Construction by CSI division

DIVISION	AMOUNT	SHARE
Division 01 — General Requirements	$6,677,684	11.3%
Division 03 — Concrete	$2,356,038	4.0%
Division 04 — Masonry	$372,478	0.6%
Division 05 — Metals	$695,592	1.2%
Division 06 — Wood, Plastics, and Composites	$10,224,046	17.4%
Division 07 — Thermal and Moisture Protection	$1,346,307	2.3%
Division 08 — Openings	$2,696,429	4.6%
Division 09 — Finishes	$4,616,399	7.8%
Division 10 — Specialties	$482,768	0.8%
Division 11 — Equipment	$1,869,917	3.2%
Division 12 — Furnishings	$1,626,490	2.8%
Division 21 — Fire Suppression	$628,277	1.1%
Division 22 — Plumbing	$3,667,938	6.2%
Division 23 — Heating, Ventilating, and Air Conditioning (HVAC)	$2,607,348	4.4%
Division 26 — Electrical	$2,936,271	5.0%
Division 27 — Communications	$457,332	0.8%

DIVISION	AMOUNT	SHARE
Division 28 — Electronic Safety and Security	$1,242,049	2.1%
Division 31 — Earthwork	$2,152,532	3.7%
Division 32 — Exterior Improvements	$3,963,140	6.7%
Division 33 — Utilities	$280,331	0.5%
Profit — GC fee on library lines (12%)	$5,402,659	9.2%
Construction contingency	$2,544,968	4.3%

Land is a share of project cost of 3.7%, outside the usual 5–30%.

Pro forma

The platform's month-by-month development model: land at closing, soft costs through pre-development and construction, hard costs on an S-curve, equity first then a 60% construction loan at 6.9% (interest capitalized), lease-up income paying the loan down, a permanent loan at stabilization (the smaller of 65% of value and 1.25× coverage at 6.71%), and a sale on forward NOI at a 5.75% cap rate after 5 years. Pre-development 9 months, construction 25, lease-up 19; stabilized month 53, sale at month 113.

RETURN	VALUE
Unlevered IRR	5.33%
Levered IRR	3.51%
Unlevered NPV at 10%	−$16,007,494
Levered NPV at 10%	−$11,255,356
Equity multiple	1.28×
Peak equity	$37,353,300
Levered profit (cash out − cash in)	$10,596,476
Yield on cost	4.86%
Stabilized value at the market cap	$70,058,382
Value over cost	−$9,169,265
DSCR, first stabilized year	1.25×
Cash on cash	1.82%
Peak construction loan	$49,891,663 (63.0% of cost)

Break-even rent $1,896/unit/mo against $1,602 modeled; $2,414 reaches a 7.00% yield on cost. Average monthly rent a unit at which stabilized value (NOI ÷ market cap) equals cost, and the rent for a yield on cost 1.5% over the market cap (a usual development spread).

STABILIZED YEAR (TODAY'S RENTS)	AMOUNT
39 × Studio @ $1,175/mo	$549,900
175 × 1 BR @ $1,425/mo	$2,992,500
136 × 2 BR @ $1,795/mo	$2,929,440
39 × 3 BR @ $2,150/mo	$1,006,200
Other income (fees, parking, utilities billed back)	$350,100
Vacancy and credit loss	−$626,251
Effective gross income	$7,201,889
Operating costs, taxes, management, reserves	−$3,348,678
Net operating income	$3,853,211

Annual cash flow

YEAR	COST	NOI	LEVERED CASH
1	$6,936,548	$0	−$6,936,548
2	$38,591,165	$0	−$21,542,792
3	$25,670,636	−$230,412	$0
4	$0	−$367,739	$0
5	$0	$3,515,269	−$8,457,236
6	$0	$4,108,311	$933,265
7	$0	$4,231,560	$1,056,514
8	$0	$4,358,507	$1,183,461
9	$0	$4,489,262	$1,314,216
10	$0	$2,300,468	$43,045,594


Hold analysis (stabilized, before tax)

The stabilized asset bought at its total development cost and held 5 years, on the budgeting suite's before-tax engine (proven on five reference deals): year-1 NOI $4,368,347, a 5.51% cap on cost; optimal hold year 5 at 7.80% equity IRR.

YEAR	NOI	DEBT SERVICE	CASH FLOW	DSCR	CASH ON CASH	EQUITY IRR IF SOLD
1	$4,368,347	$3,175,046	$1,193,301	1.38×	3.09%	-3.41%
2	$4,499,397	$3,175,046	$1,324,352	1.42×	3.42%	3.58%
3	$4,634,379	$3,175,046	$1,459,333	1.46×	3.77%	5.96%
4	$4,773,411	$3,175,046	$1,598,365	1.50×	4.13%	7.13%
5	$4,916,613	$3,175,046	$1,741,567	1.55×	4.50%	7.80%

Sensitivity

Each case re-runs the budget and the pro forma (a cost change carries its contingency, fees and interest).

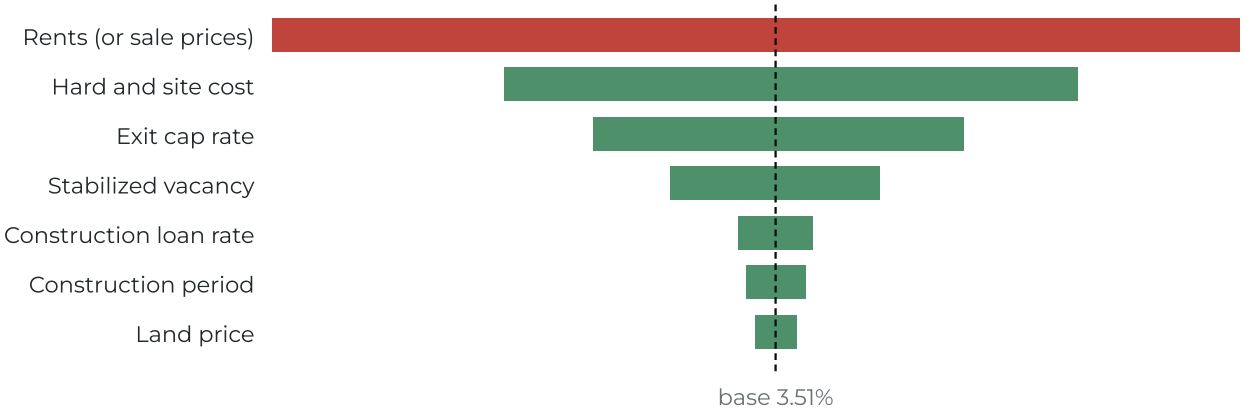

INPUT	LOW CASE	LEVERED IRR	HIGH CASE	LEVERED IRR
Rents (or sale prices)	−10%	-2.12%	+10%	8.70%
Hard and site cost	−10%	6.89%	+10%	0.47%
Exit cap rate	+0.50%	1.47%	−0.50%	5.61%
Stabilized vacancy	+2 pts	2.32%	−2 pts	4.67%
Construction loan rate	+1.00%	3.09%	−1.00%	3.92%
Construction period	+3 months	3.18%	−3 months	3.85%
Land price	+15%	3.27%	−15%	3.74%

Levered IRR: cost × rent

	−10% RENT	−5% RENT	0% RENT	+5% RENT	+10% RENT
−10% cost	1.1%	4.0%	6.9%	9.6%	12.3%
−5% cost	-0.6%	2.4%	5.1%	7.8%	10.4%
0% cost	-2.1%	0.8%	3.5%	6.1%	8.7%
+5% cost	-3.6%	-0.8%	1.9%	4.6%	7.1%
+10% cost	-5.0%	-2.2%	0.5%	3.0%	5.5%

Levered IRR: exit cap × rates

	-1.00% RATES	-0.50% RATES	0.00% RATES	+0.50% RATES	+1.00% RATES
−0.50% exit cap	6.6%	6.1%	5.6%	5.2%	4.8%
−0.25% exit cap	5.5%	5.0%	4.5%	4.1%	3.7%
0.00% exit cap	4.5%	4.0%	3.5%	3.1%	2.7%
+0.25% exit cap	3.4%	2.9%	2.5%	2.1%	1.7%
+0.50% exit cap	2.3%	1.9%	1.5%	1.1%	0.8%

Scenarios

SCENARIO	TOTAL COST	NOI	YIELD ON COST	LEVERED IRR	PROFIT
Base case	$79,227,648	$3,853,211	4.86%	3.51%	$10,596,476
Rates +1%	$80,432,126	$3,853,211	4.79%	2.74%	$8,789,960
More one-bedrooms	$79,236,638	$3,551,169	4.48%	1.13%	$3,361,368
Costs +10%	$85,976,616	$3,747,044	4.36%	0.38%	$1,227,521

Risk analysis

LEVEL	RISK	WHY	WHAT SETTLES IT
HIGH	Thin development spread	Yield on cost 4.86% against a 5.5% market cap rate: -0.64% of spread (1.0–1.5% is the usual minimum to build rather than buy).	Firm up rents and costs; a lower land basis or a denser program.
HIGH	Levered IRR below a typical 12–15% development hurdle	Levered IRR 3.51% over 9.4 years.	Test the scenarios: financing, unit mix and costs.
HIGH	Returns turn negative on a common miss	Rents (or sale prices) −10% takes the levered IRR to -2.12%.	Price the biggest driver first (rents (or sale prices)).
MEDIUM	Negative NPV at the discount rate	Levered NPV $-11,255,356 at 10%.	Revisit the hurdle or the deal.
MEDIUM	Parcel lines are not a survey	Areas come from appraisal-district or provider outlines.	A boundary survey (or enter its metes and bounds at intake).
MEDIUM	Detention sized by rule of thumb	Detention 8.79 ac-ft from a typical release rate, not the jurisdiction's criteria.	A drainage study by a civil engineer.
MEDIUM	Costs are parametric, not bids	Building lines come from one Waller County project workbook (medium-low confidence) and platform rates (low confidence); none is a contractor price.	A GC budget or a cost consultant's estimate.
LOW	Flood zone not checked	The site's FEMA zone wasn't looked up for this study.	Open the project's Overview to look up the site.
LOW	No sale or lease comps	Cap rates and rents are platform assumptions; Texas does not disclose sale prices.	Broker opinion of value or a licensed comps provider.

Fact & assumption register

Every input and measured fact with where it came from. *Public data*: the platform's nightly data; *Cost library*: the FS budget workbook; *From the concept plan*: measured on the layout; *House assumption*: a platform default, not verified; *Your input*: changed in the workspace.

GROUP	ITEM	VALUE	SOURCE	CONFIDENCE
Site	Site area	15.97 acres (695,836 sf)	Public data: Parcel outlines from the appraisal district / provider (not a survey)	medium
Site	Buildable envelope at a 10 ft setback	660,498 sf (95% of the site)	Calculated: Distance-transform envelope of the parcels (lib/feasibility/envelope.mjs)	medium
Site	Building area	425,611 gross sf	From the concept plan: Measured on the concept layout	medium
Site	Units	389	From the concept plan: Measured on the concept layout	medium
Site	Parking	657 spaces of 623 required	From the concept plan: Measured on the concept layout	medium
Site	Coverage / FAR	20.91% / 0.61	From the concept plan: Measured on the concept layout	medium
Site	Detention	8.79 ac-ft	From the concept plan: Stormwater sizing rule on the developed acres (the rate is a typical value, not a drainage study)	low
Cost	Land price	$2,600,000	Your input: Asking / contract price entered at intake	medium
Cost	Land closing costs	1.50%	House assumption: Title, survey, legal at closing (1–2%)	low
Cost	Location cost factor	1.00×	House assumption: 1.00: the site is in the region the cost library and parametric rates were priced for (Waller / Houston area)	medium-low
Cost	Materials share of hard cost (escalated by the PPI)	55%	House assumption: Typical materials share of building cost (labor and fees are the rest)	low
Cost	Forward cost escalation	3.50%	House assumption: Annual construction-cost escalation to the construction midpoint	low
Cost	GC fee on library lines	12%	Cost library: Finishes Solutions budget template: company profit 12% of hard cost (2026-08-10)	medium-low
Cost	Developer fee (of total project cost)	3%	House assumption: Developer fee, a share of total project cost before financing (2–5%)	low
Cost	Contingency	5%	House assumption: Hard-cost contingency at concept stage (3–10%)	low
Cost	Site prep	$3/sf	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Cost	Paving	$7.5/sf	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Cost	Parking a space	$2,750	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Cost	Detention pond	$30,000	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	Studio rent	$1,175/mo	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	1 BR rent	$1,425/mo	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low

GROUP	ITEM	VALUE	SOURCE	CONFIDENCE
Revenue	2 BR rent	$1,795/mo	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	3 BR rent	$2,150/mo	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	Other income a unit	$75/mo	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	Vacancy	7%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Revenue	Credit loss	1%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Operations	Apartment operating costs	$4,600	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Operations	Property tax rate	2.50%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Operations	Taxable share of cost	70%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Operations	Management fee	3%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Financing	Construction rate	6.90%	Calculated: SOFR 3.90% (FRED, 2026-10-22) + 3.00% construction-loan spread (house) (2026-10-22)	medium
Financing	Permanent rate	6.71%	Calculated: 10-yr Treasury 4.96% (FRED, 2026-10-22) + 1.75% permanent-loan spread (house) (2026-10-22)	medium
Financing	Loan to cost	60%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Financing	Loan fee	1%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Financing	Amortization	30 years	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Financing	Loan to value	65%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Financing	Debt coverage (DSCR)	1.25×	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Exit & returns	Market cap rate	5.50%	House assumption: Going-in cap rate by use, Houston suburban 2026 (UNVERIFIED: the platform has no sale comps)	low
Exit & returns	Exit cap rate	5.75%	House assumption: Exit cap = market cap + 0.25%	low
Exit & returns	Sale costs	2%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Exit & returns	Rent growth	3%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Exit & returns	Expense growth	3%	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low
Exit & returns	Hold after stabilizing	5 years	House assumption: Platform default: 2026 Houston / Katy / Waller suburban market assumption (UNVERIFIED) (2026)	low

GROUP	ITEM	VALUE	SOURCE	CONFIDENCE
Exit & returns	Discount rate (NPV)	10%	House assumption: Discount rate for net present value: a levered development hurdle	low
Schedule	Pre-development	9 months	House assumption: Schedule from the program's size and type (lib/proforma.mjs scheduleFor)	low
Schedule	Construction	25 months	House assumption: Schedule from the program's size and type (lib/proforma.mjs scheduleFor)	low
Schedule	Lease-up	19 months	House assumption: Schedule from the program's size and type (lib/proforma.mjs scheduleFor)	low
Cost	Escalation: Library rates (to date and forward)	× 1.0680	Calculated: PPI: construction materials (BLS, via FRED) 2026-08 375.792 → 2026-09 378.61 (0.75%) × materials share 55%; 3.5% a year for 1.79 years to the construction midpoint	medium
Cost	Escalation: Parametric rates (forward)	× 1.0636	Calculated: The rate has no as-of month: no to-date escalation applied.; 3.5% a year for 1.79 years to the construction midpoint	medium

Budget line items

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
01 01 00	Project Management	420,211	residential sf	$8.01	$3,365,768	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 02 00	Insurance	420,211	residential sf	$1.62	$682,129	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 04 00	Equipment & Supplies	420,211	residential sf	$0.75	$314,138	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 05 00	Security	420,211	residential sf	$0.19	$80,778	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 50 00	Temporary Facilities (Toilets, Fencing, Power, Water)	420,211	residential sf	$1.28	$538,523	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 70 00	Execution & Closeout	420,211	residential sf	$0.59	$246,823	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 74 00	Construction Waste Management & Disposal	420,211	residential sf	$2.33	$978,317	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 06 00	Testing & Surveying	420,211	residential sf	$0.43	$179,508	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
01 07 00	Inspections	420,211	residential sf	$0.69	$291,700	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
03 30 00	Foundation / Slab w/ Termite Treatment	420,211	residential sf	$5.61	$2,356,038	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
04 40 00	Stone Assemblies	420,211	residential sf	$0.89	$372,478	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
05 10 00	Structural Metal / Stairs / Handrails / Dumpster Doors	420,211	residential sf	$1.66	$695,592	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
06 10 00	Rough Carpentry / Framing / Roof Framing / Sheathing / Siding	420,211	residential sf	$21.95	$9,222,205	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
07 21 00	Insulation	420,211	residential sf	$1.48	$623,789	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
07 40 00	Roofing	420,211	residential sf	$1.37	$574,424	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
07 60 00	Gutters / Downspouts	420,211	residential sf	$0.35	$148,094	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 10 00	Doors & Frames (Exterior)	420,211	residential sf	$2.67	$1,121,923	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 50 00	Windows	420,211	residential sf	$1.29	$543,011	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 70 00	Door Hardware (Exterior)	420,211	residential sf	$0.11	$44,877	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 90 00	Exterior Painting & Coating	420,211	residential sf	$0.50	$210,921	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
21 10 00	Water-Based Fire Suppression	420,211	residential sf	$1.50	$628,277	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
22 05 00	Plumbing	420,211	residential sf	$8.67	$3,644,005	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
23 05 00	HVAC	420,211	residential sf	$6.20	$2,607,348	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
26 05 00	Electrical	420,211	residential sf	$6.93	$2,912,511	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
27 10 00	Structured Cabling (Ethernet & Cameras)	420,211	residential sf	$0.87	$363,503	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
28 46 00	Fire Detection & Alarm	420,211	residential sf	$1.45	$610,326	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
06 20 00	Finish Carpentry / Baseboards / Casing / Trim	420,211	residential sf	$2.27	$955,878	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 11 00	Interior Doors & Frames	420,211	residential sf	$1.40	$587,888	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 71 00	Interior Door Hardware	420,211	residential sf	$0.21	$89,754	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 83 00	Mirrors	420,211	residential sf	$0.31	$130,143	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 20 00	Plaster & Gypsum Board	420,211	residential sf	$5.04	$2,118,190	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
09 30 00	Tiling / Bathroom & Backsplash	420,211	residential sf	$1.03	$430,818	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 60 00	Flooring	420,211	residential sf	$1.91	$803,297	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 91 00	Interior Painting & Coating	420,211	residential sf	$2.33	$978,317	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 14 00	Signage / Unit & Building Numbers	420,211	residential sf	$0.11	$44,877	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 28 00	Toilet, Bath & Laundry Accessories	420,211	residential sf	$0.66	$278,237	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
11 31 00	Residential Appliances	420,211	residential sf	$3.72	$1,561,716	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 21 00	Window Blinds	420,211	residential sf	$0.35	$148,094	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 30 00	Casework / Stock Cabinets	420,211	residential sf	$2.15	$902,026	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 36 00	Countertops	420,211	residential sf	$1.21	$507,109	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 55 00	Mailboxes	420,211	residential sf	$0.27	$112,192	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
28 10 00	Electronic Access Control & Intrusion Detection	420,211	residential sf	$1.22	$511,597	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
32 31 00	Fences & Gates / Motors	420,211	residential sf	$1.39	$583,400	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
32 33 00	Site Furnishings / Benches / Bike Racks	420,211	residential sf	$0.47	$197,458	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 10 00	Doors & Frames (amenity)	5,400	amenity sf	$2.67	$14,417	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 40 00	Storefront / Glass Partitions (amenity)	5,400	amenity sf	$22.60	$122,030	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
22 30 00	Plumbing Fixtures (amenity)	5,400	amenity sf	$4.43	$23,933	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
26 50 00	Light Fixtures (amenity)	5,400	amenity sf	$4.40	$23,760	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
27 10 00	Structured Cabling (Ethernet & Cameras) (amenity)	5,400	amenity sf	$10.08	$54,440	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
27 11 00	Communications Equipment Room (amenity)	5,400	amenity sf	$7.29	$39,389	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
28 10 00	Access Control / Intrusion Detection (amenity)	5,400	amenity sf	$12.63	$68,224	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
28 20 00	Electronic Surveillance / Cameras (amenity)	5,400	amenity sf	$4.27	$23,068	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
28 46 00	Fire Detection & Alarm (amenity)	5,400	amenity sf	$5.34	$28,835	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
06 20 00	Finish Carpentry / Millwork / Trim (amenity)	5,400	amenity sf	$8.51	$45,963	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 11 00	Interior Doors & Frames (amenity)	5,400	amenity sf	$4.66	$25,144	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
08 71 00	Door Hardware (amenity)	5,400	amenity sf	$3.19	$17,243	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 30 00	Tiling / Bathroom & Backsplash (amenity)	5,400	amenity sf	$8.77	$47,347	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
09 60 00	Flooring (amenity)	5,400	amenity sf	$5.09	$27,509	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 14 00	Signage (amenity)	5,400	amenity sf	$0.17	$923	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 28 00	Toilet, Bath & Laundry Accessories (amenity)	5,400	amenity sf	$8.48	$45,790	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
10 44 00	Fire Protection Specialties / Extinguishers (amenity)	5,400	amenity sf	$0.14	$750	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
11 60 00	Entertainment Equipment / Game & Media Room (amenity)	5,400	amenity sf	$3.20	$17,301	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
11 65 00	Athletic & Recreational / Fitness Equipment (amenity)	5,400	amenity sf	$5.34	$28,835	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
12 30 00	Casework / Stock Cabinets (amenity)	5,400	amenity sf	$5.69	$30,738	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 36 00	Countertops (amenity)	5,400	amenity sf	$4.27	$23,068	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 50 00	Leasing Office / Clubhouse Furniture (amenity)	5,400	amenity sf	$1.86	$10,035	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
12 60 00	Multiple / Amenity Seating (amenity)	5,400	amenity sf	$1.00	$5,421	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-01	Architect	420,211	residential sf	$2.65	$1,113,559	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-02	Civil Engineer	420,211	residential sf	$1.58	$663,933	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-03	Structural Engineer	420,211	residential sf	$1.17	$491,647	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-04	MEP Engineer	420,211	residential sf	$0.33	$138,670	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-05	Landscape Architect	420,211	residential sf	$0.15	$63,032	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-06	Geotechnical Engineer	420,211	residential sf	$0.18	$75,638	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-07	Environmental Study	420,211	residential sf	$0.04	$16,808	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-08	TxDOT Driveway Permitting	420,211	residential sf	$0.28	$117,659	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-09	Traffic Impact Analysis	420,211	residential sf	$0.36	$151,276	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-10	Flood Plain Mitigation	420,211	residential sf	$0.18	$75,638	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-11	Pad Elevation Certificates	420,211	residential sf	$0.22	$92,446	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-12	A/E Construction Administration	420,211	residential sf	$0.39	$163,882	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
SC-13	Surveyor	420,211	residential sf	$0.13	$54,627	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-14	Renderings	420,211	residential sf	$0.10	$42,021	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-15	Reimbursables	420,211	residential sf	$0.18	$75,638	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-16	Plan Printing	420,211	residential sf	$0.06	$25,213	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-17	Precon Services (6 mo)	420,211	residential sf	$0.29	$121,861	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-18	Design Contingency (≈10%)	420,211	residential sf	$0.83	$348,775	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-20	Water & Sewer Impact & Tap Fees	420,211	residential sf	$7.50	$3,151,582	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-21	Permitting & Inspection Fees	420,211	residential sf	$0.45	$189,095	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-22	Plan Review Fees	420,211	residential sf	$0.15	$63,032	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
SC-23	Fees Contingency (≈10%)	420,211	residential sf	$0.81	$340,371	Finishes Solutions budget workbook (Budget For Projects 3.0), Waller County TX multifamily, back-solved $/SF
31 00 00	Site preparation: clearing, mass grading, lime-stabilized pads, erosion control, on-site utilities, landscaping, lighting	674,622	sf developed	$3.19	$2,152,532	Platform parametric rate, 2026 Houston / Katy / Waller suburban starting point (UNVERIFIED; range in the pro forma notes); quantity from the concept layout
32 12 00	Drives, fire lanes and plazas outside the parking lots (concrete; truck courts at 1.25×)	158,042	sf	$7.98	$1,260,668	Platform parametric rate, 2026 Houston / Katy / Waller suburban starting point (UNVERIFIED; range in the pro forma notes); quantity from the concept layout
32 17 00	Surface parking spaces: paving, striping, lighting, islands	657	spaces	$2,924.83	$1,921,614	Platform parametric rate, 2026 Houston / Katy / Waller suburban starting point (UNVERIFIED; range in the pro forma notes); quantity from the concept layout
33 46 00	Detention pond: excavation, outfall structure, slopes and seeding	8.79	ac-ft	$31,907.25	$280,331	Platform parametric rate, 2026 Houston / Katy / Waller suburban starting point (UNVERIFIED; range in the pro forma notes); quantity from the concept layout

CSI	ITEM	QTY	UNIT	RATE	AMOUNT	SOURCE
11 68 00	Amenity pieces on the plan: courts, pool and deck, playground	1.00	ls	$262,064.88	$262,065	Platform parametric rate, 2026 Houston / Katy / Waller suburban starting point (UNVERIFIED; range in the pro forma notes); quantity from the concept layout

Sources: Parcels: appraisal district / provider outlines held by the platform. Layout, quantities and plan set: the platform's layout engine and plan-set builder (concept, schematic). Costs: Finishes Solutions budget workbook (2026.08-v2, Waller County TX), platform parametric rates (2026, UNVERIFIED), BLS PPI construction materials via FRED (escalation). Rates: SOFR and 10-yr Treasury via FRED. Rents: platform assumptions with Zillow ZORI as a check. Returns: the platform's development model and the budgeting suite's before-tax engine.